

RAS 98-E *ULTRA*


COMPUTER CONTROLLED BUFFING MACHINE

with expanding hub and rim assembly

MACHINE SUITABLE FOR TRUCK TYRES
UP TO 445 R 22.5" AND 495/45 R 22.5"



- THE MACHINE CAN PROVIDE ANY BUFFED PROFILE. Each buffing programme can control up to 3 different buffing radii and relevant speeds for the crown area (negative radius is also possible) and 3 radii for the sidewalls.

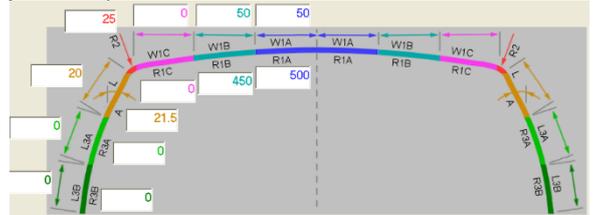

- "BEC 90" STEEL BELT DETECTOR AND "LASER 300" COMPUTER INTERACTIVE CIRCUMFERENCE MEASURING DEVICE. "BEC 90", used in combination with "LASER 300", allows different operating options that include tyre casing buffing with diameter/ circumference set to zero so that buffing profile is completed according to rubber thickness to be left on the steel belts.



- 15" COLOUR TOUCH SCREEN USER INTERFACE. The industrial PC features two USB ports for data backup and software updating.
- COMPREHENSIVE SELF DIAGNOSTIC AND TROUBLESHOOTING SYSTEM.
- ARTICULATED BUFFING/BRUSHING ARM, COMPUTERISED SIDEWALL BRUSHING UNIT and CABLE LIFT are available on request.



matteuzzi srl


Via Serra, 1/E - 3
40012 CALDERARA DI RENO, ITALY
Phone ++39 - 051726351
matteuzzi@matteuzzi-srl.com
www.matteuzzi-srl.com

RAS 98-E *ULTRA*


COMPUTER CONTROLLED BUFFING MACHINE
with expanding hub and rim assembly

dimensioni della macchina in servizio in mm

dimensions of the machine in service in mm

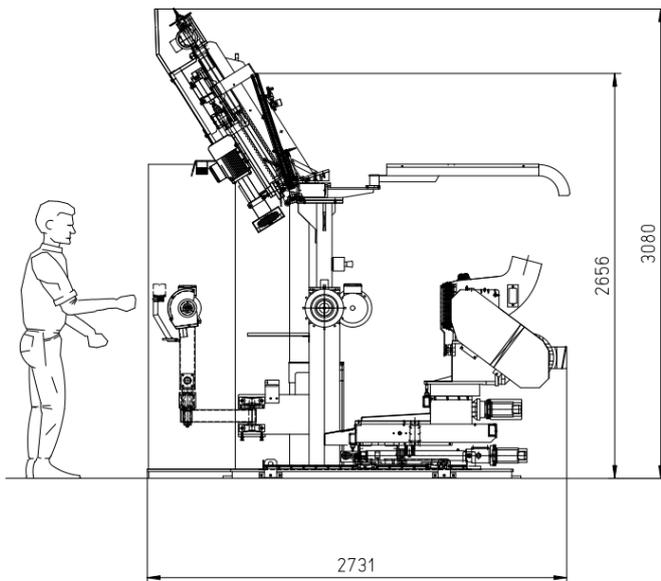

side view

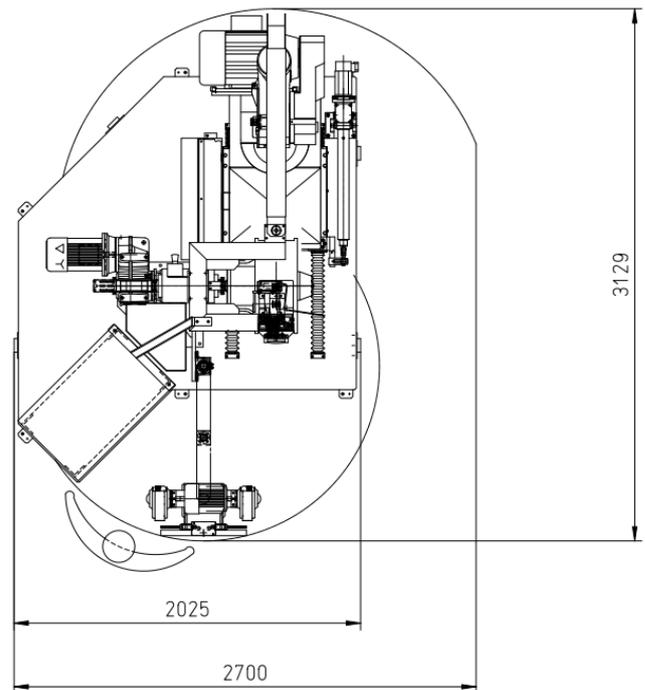

top view

gamma di pneumatici	<i>tyre size range</i>	14" - 22.5" (including 445 R 22.5" and 495/45 R 22.5")
produzione media	<i>floor to floor average output</i>	20/25 carcasse/h – tyre casing per hour
potenza totale installata	<i>total installed power</i>	48 kw (65 HP) includes 40 HP rasp head motor
alimentaz. aria compressa	<i>compressed air supply</i>	min 6 bar (90 psi) / max 8 bar (120 psi)
consumo aria compressa	<i>compressed air absorption</i>	1100 NI/cycle (39 cu ft/cycle).
peso netto	<i>net weight</i>	with manual arm & sidewall unit: 2920 kg (6438 lbs) with sidewall unit only: 2840 kg (6261 lbs) with manual arm only: 2480 kg (5580 lbs)



MACCHINE PER PNEUMATICI E PER I PROCESSI DI RICOSTRUZIONE
EQUIPMENT FOR THE TYRE AND RETREADING INDUSTRIES

matteuzzi srl

Via Serra, 1/E - 3
40012 CALDERARA DI RENO, ITALY
Phone ++39 - 051726351
matteuzzi@matteuzzi-srl.com
www.matteuzzi-srl.com